


MiniLoob 1

Code 3451

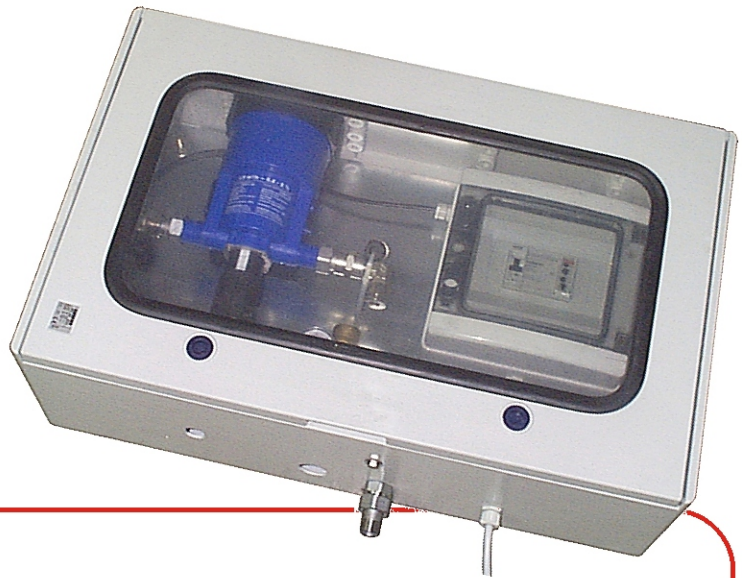

Description

the dosing unit MINILOOB 1 contains an hydraulic proportional dosing pump and an electronic timer to operate ON and OFF the solenoid valve in order to mix the lubricant product and water.

The minimum required water pressure is 2,5 bar; the pump can be set from 0,2% to 2% in steps of 0,1%

The small size and the installation easiness make MINILOOB 1 suitable in may situations, also as a booster in belts critical points.

This unit is also manufactured in the following models: for 2 lines code 3812, for 3 lines code 3953, for 4 lines code 3764.

On request the complete spraying nozzle kit with s.s. strip (code 3497) is available.

Main features

Water pressure supply	0,5 to 5 bar
Water delivery	20 to 1500 lts/hour
Voltage supply	230V 50/60Hz
Electrical input	15 VA
Solenoid valve	24 Vac
Water inlet	M-3/4 G
Solution output	quick fitting 10x8 mm.
Suggested s.s. nozzle	650025
Solution delivery	80 gr/minute per nozzle
Weight on delivery	20 kgs.
Size	650x405x200 mm.