


# Spraying unit

**Code 3497**

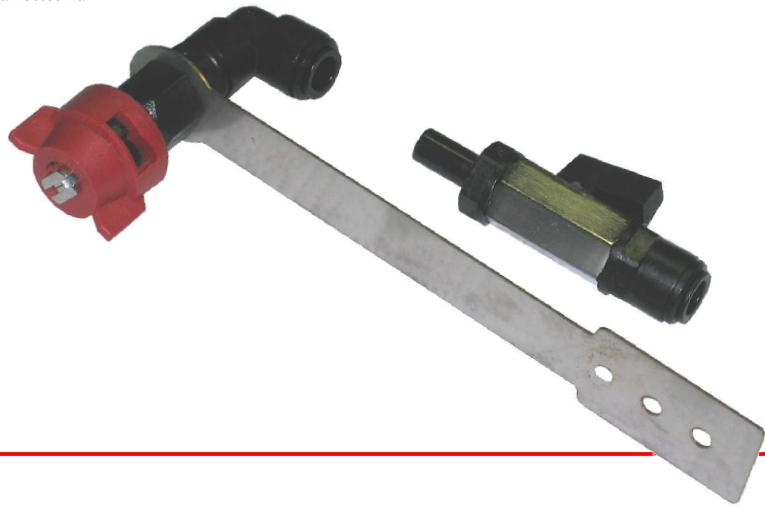

## Description

This spraying unit can easily be installed on the side of the conveyor belt, at the end side, in the storing areas etc.

It can be installed by fastening the s.s. strip via the holes available on the base; than the strip can be bent or shaped to turn the lubricant solution to the concerned zone.

The spraying unit comes with a s.s. nozzle that can easily be desmantled for replacement or maintenance, plus a ball valve fitted with a quick coupling for plastic tubes.

## Technical features

<b>Fitting strip</b>	<b>AISI 304</b>
<b>Size</b>	<b>200x30 mm.</b>
<b>Supplied nozzle</b>	<b>650025</b>
<b>Water delivery @ 2 bar</b>	<b>80 cc/minute</b>
<b>Coverage at 20 cm from nozzle</b>	<b>25 cm</b>
<b>Strainer &amp; check valve</b>	<b>PP 100 mesh</b>
<b>Ball valve</b>	<b>FF 1/4" G</b>
<b>Quick fitting</b>	<b>plastic tube 8 x 10 mm.</b>