


BPX Injector

Cod. 3021

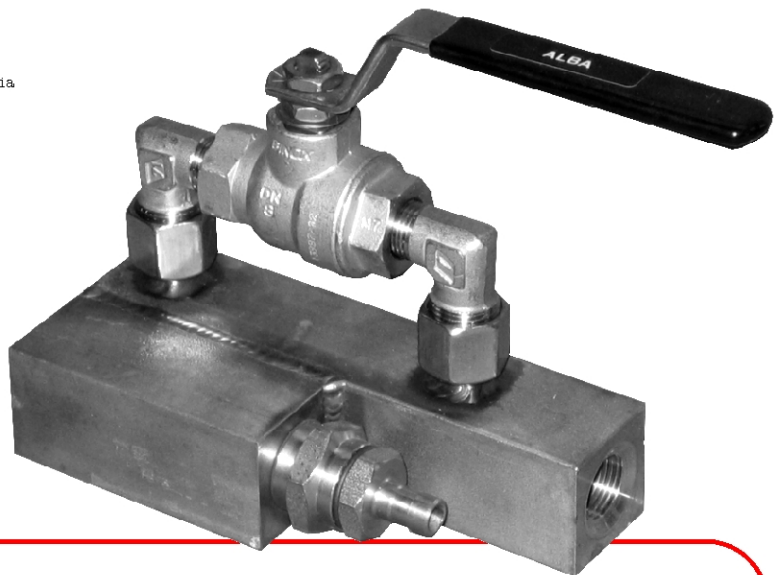

Description

This injector has been designed to be connected to hydrowashers or to the valves of high pressure ring mains systems. It is constructed in s.s., and different foam detergents (alkaline-acid-chlorinated) or disinfectants/insecticides can be used by installing the proper lance. A special s.s. check valve is installed in the suction chamber, together with the gasket made of 3 mm. thickness PTFE.

The by-pass valve allows the full water delivery when rinse operations are necessary.

The injector comes with one installed orifice plate for a concentration of about 5%.

Different orifice plates (14 sizes) are available on specific request.

It is also available with the stainless steel case (Code 3970).

Main features

Working pressure	150 BAR max.
Water temperature	80° C max.
Water delivery	21 Lt/1'
Concentration	20% max.
Height from floor	1,80 mt. Max.
Sucking hose	D.8 - 2 mts.
Inlet/Outlet	Female 1/2" Gas
Generated foam amount	200 lt/1'
Sizes (mm)	60 x 135 x 125 h
Weight on delivery	2,3 Kgs