




DueBi srl

Sistemi per pulizia e igiene nell'Industria Alimentare e nella Zootecnia

Sede legale : via Villani, 2 - 26900 - Lodi
Sede operativa : via Napoli, 6 - 26900 - Lodi
Web : www.2bi.it
e-mail : duebisrl@2bi.it
Tel. : (39) 0371 610210
Fax : (39) 0371 417859

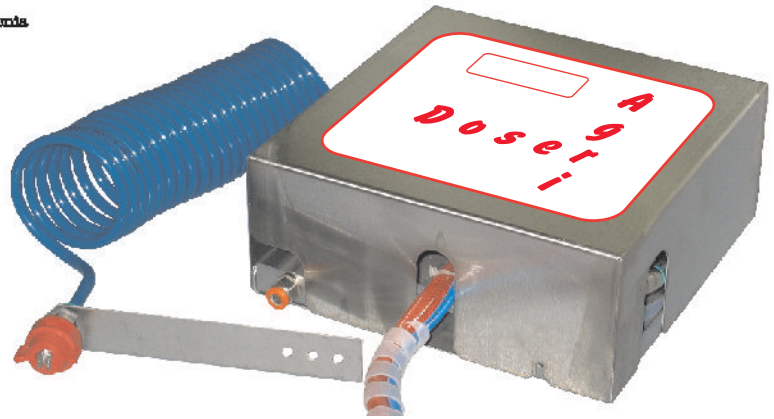

Doser Agri

Cod. 3649

Descrizione

This unit has been specially designed for installation on silage cutters in order to deliver proper additives on forages, hay bales, etc.. It is made of a stainless steel box containing a 12V self priming pump, adjusting valves etc., and can be fixed at a side of the cutting machine or near the bottom of the product tank . The pump can be connected to the socket in the driving cabin or directly to the battery by the supplied cable (without plug).

The suction hose with stainless steel strainer must be placed in the tank solution and when the pump is started up the special wide angle nozzle (110°) supplies the solution at a constant pressure and flow through the adjusting valves available in the doser. Thanks to these valves, the Doser Agri is extremely flexible since it can supply the solution by one up to 50 nozzles at the same time.

The standard equipment comes with one nozzle and stainless steel fastener; a stainless steel bar with 4 nozzles or a cheaper brass version are also available on request.

Caratteristiche tecniche

- **Pump** **self priming 12V - 7A**
- **Connection cable** **4 mts. - 2x4mm.**
- **Safety pressure switch** **included**
- **Pressure relief valve** **1/2 "**
- **Delivery calibration valve** **1/4 "**
- **Suction hose** **4 mts. - D. 8x13 with S.S. strainer**
- **By-pass hose** **4 mts. - D. 4x6**
- **Delivery spiral hose** **6 mts. - D. 6x8mm.**
- **Standard nozzle** **110-01 with S.S. bracket**
- **Other delivery nozzles** **on request**
- **Maximum total delivery** **5 lts/min**
- **Pressure factory setting** **2 bar**
- **Maximum pressure** **4 bar**
- **Sizes** **240x240x100 mm.**
- **Weight** **kgs. 5**